(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



I TREIT BUILDEN IN BURNE HEN BERN BERN BERN IN HIN BURN BURN BURN BURN BERN BURN BURN BURN HER HER HER HER HER

(43) International Publication Date 9 June 2005 (09.06.2005)

PCT

(10) International Publication Number WO 2005/052095 A1

- (51) International Patent Classification⁷: C10J 3/52, 3/48
- (21) International Application Number:

PCT/EP2004/053148

(22) International Filing Date:

29 November 2004 (29.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

03104450.6


28 November 2003 (28.11.2003) EI

(71) Applicant (for all designated States except US): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SCHILDER, Johannes, Gerardus, Maria [NL/NL]; Badhuisweg 3, NL-1031 CM Amsterdam (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: SPRAY RING AND REACTOR VESSEL PROVIDED WITH SUCH A SPRAY RING AND A METHOD OF WETTING CHAR AND/OR SLAG IN A WATER BATH

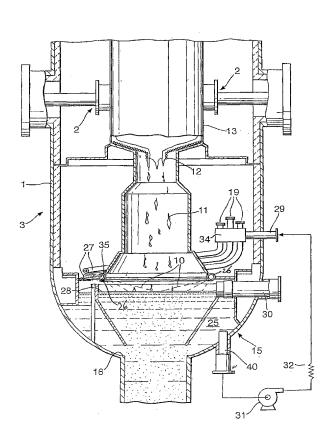

(57) Abstract: A spray ring (26), for wetting char and/or slag in a water bath (25) with a wetting fluid, the spray ring (26) comprising a loop conduit (39) arranged in a loop-line, which loop conduit is at an inlet point provided with an inlet for feeding the wetting fluid into the loop conduit in an inlet flow direction, and with a plurality of outlet openings for spraying the wetting fluid out of the loop conduit, (36) wherein the inlet flow direction has a component that is tangential to a loop-line flow direction of the wetting fluid through the loop conduit at the inlet point.

WO 2005/052095 A1



FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report